

1. Place first board on floor and fold down any high back bindings.
2. Place pair of boots on front of board and the second pair on the rear of the board.
3. Fold down any high back bindings on the second board and place it on top of the first board and boots, tip to tail with the bindings of the second board staggered between the bindings of the first. (Fig 1)
4. Holding everything in place, slide boards and boots into the internal section of Sportube.
5. Slide external section over the board and boots until you are at your desired length. Place TSA lock/wire case pin through one of the two holes, in both sections to secure/lock. (Fig 2)

SERIES 3 SPORTUBE: (Two Snowboards & boots)

1. Place board on floor and fold down any high back bindings.
2. Place pair of boots on front or rear of board.
3. Slide board and boots inside wheeled section of Sportube.
4. Slide handled section over the board and boots until you are at your desired length. Place TSA lock/wire case pin through one of the two holes, in both sections to secure/lock. (Fig. 2)

SERIES 3 SPORTUBE: (One Snowboard & boots)



Fig 2

WARNING: TSA lock or wire case pin must pass through BOTH sections to be secure.



Fig 1

For best results, we recommend the following packing process:

'ORIGINAL BLACK' SPORTUBES CARRY A 5 YEAR LIMITED MANUFACTURER'S WARRANTY (EFF. AUGUST 1, 2006)

'SPECIAL EDITION' SPORTUBES CARRY A LIMITED LIFETIME MANUFACTURER'S WARRANTY (EFF. SEPTEMBER 1, 2010)

For More Information and to Register Online Visit:

www.sportube.com

Highland Trading Co., Inc. (H.T.C. Inc.) will warranty all SPORTUBE cases during the time that the original purchaser owns the product(s). This warranty terminates if a purchaser transfers the product to any other person.

Subject to the limitations and exclusions (defined in our full warranty online at www.sportube.com, H.T.C. Inc. will remedy defects in materials or workmanship by repairing or replacing, at its option, a defective product without charge for parts and labor.

No warranty is given for defects caused by normal wear and tear (including but not limited to, cosmetic rust, scratches or dents) accidents or modifications or any types of repair other than those authorized by H.T.C. Inc.

No warranty is given for defects resulting from conditions beyond H.T.C. Inc.'s control including, but not limited to, theft, misuse, overloading, failure to use the product in accordance with H.T.C. Inc.'s written instructions or guidelines included with the product or made available to the purchaser. H.T.C. Inc. shall not be liable for consequential or incidental damages or economic loss.

For More Information and to Register Online visit:

www.sportube.com

SPORTUBE®
SKI & SNOWBOARD TRANSPORTATION CASES

PROTECT YOUR GEAR!

**Instructions &
Warranty Info**

CHECK IT. SHIP IT. DRIVE IT.

Highland Trading Company, Inc.
PO Box 502, Avon, CO 81620 USA
P.1.800.423.4439 P.970.949.4014

www.sportube.com
info@sportube.com



For best results, we recommend the following packing process:

SERIES 1 SPORTUBE: (Single Ski)*can also hold 2 pair of XC skis & poles

Two rubber brake retainers included with Series 1 Sportube.

1. Lay skis on floor, tip to tail, bindings facing each other. Use two of the enclosed rubber brake retainers to retract brakes. (Fig 5)
Position poles on top of skis
2. Slide wheeled section of Sportube over skis (Fig 1)
3. Slide handled section over skis from opposite end and close case tightly over skis
4. Place TSA lock/wire case pin through one of the two holes, in both sections to secure/lock. (Fig 6)

Fig 1



SERIES 2 SPORTUBE: (Double Ski)*can also hold 4 pair of XC skis & poles

Four nylon ski straps and four rubber brake retainers included with Series 2 Sportube.

1. Place one set of skis tip to tail, bindings facing each other on the floor. Use two of the rubber brake retainers to retract brakes. (Fig. 5) Secure skis and poles in this position by using two of the nylon ski straps (Fig 4) Repeat nylon straps for each pair of skis.
2. Slide wheeled section of Sportube over skis and attach Velcro strap around skis.
3. Place second pair of skis on floor as before and repeat step (1). Slide second pair of skis into case and tighten the other Velcro strap around this pair. (Fig 2)
4. Slide handled section over both pair of skis until you are at your desired length. Place TSA lock/wire case pin through one of the two holes, in both sections to secure/lock. (Fig 6)

Fig 2



Fig 3



SERIES 3 SPORTUBE: (Multi-Ski)

*We recommend purchasing a Strap and Band Kit (sold separately). The Strap and Band Kit comes with six nylon ski straps and six rubber brake retainers to help hold your skis and poles together inside a Series 3 Sportube.

1. Place one set of skis tip to tail, bindings facing each other on the floor. Use two of the rubber brake retainers to retract brakes. (Fig 5) Secure skis and poles in this position by using two of the nylon ski straps. Repeat nylon straps for each pair of skis.
2. Slide skis inside of Sportube wheeled end section.
3. Place second/third pair of skis on floor as before and repeat step (1) for each pair. Slide second pair of skis into case. If packing a third pair, slide into place between first two pairs (Fig 3)
4. Slide handled section over all skis until you are at your desired length. Place TSA lock/wire case pin through one of the two holes, in both sections to secure/lock. (Fig 6)

Fig 4





Fig 5

Use rubber bands to retract brakes. Rubber Brake Retainers should NOT come in contact with ski edge.

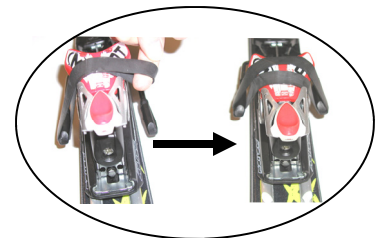

SUMMER STORAGE: Your Sportube can be used to store your skis and poles when not in use. However, we do recommend that you open up the case and allow air to circulate. This will reduce the chance of moisture corrosion or mildew affecting your equipment.

Remember, your Sportube is not *just* a ski carrier, it is also ideal for transporting fishing rods, carving snowboards, golf clubs, rifles and bows, spear guns and water-skis or whatever your imagination can come up with!! Call or email us for ideas.

Fig 6



WARNING: TSA lock or wire case pin must pass through BOTH sections to be secure.

